

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number
WO 2005/081779 A2

(51) International Patent Classification: **Not classified**

Kent, OH 44240 (US). **MILLER, Nick, M., IV** [US/US];
3512 Industry Road, Rootstown, OH 44272 (US).

(21) International Application Number:

PCT/US2005/003141

(74) Agents: **SERBINOWSKI, Paul, A.** et al.; Pearne &
Gordon, 1801 East 9th Street, Suite 1200, Cleveland, OH
44114-3108 (US).

(22) International Filing Date: 28 January 2005 (28.01.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10/782,461 19 February 2004 (19.02.2004) US
11/006,100 7 December 2004 (07.12.2004) US

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(71) Applicant (for all designated States except US): **KENT
DISPLAYS INCORPORATED** [US/US]; 343 Portage
Boulevard, Kent, OH 44240 (US).


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HUANG,
Xiao-Yang** [US/US]; 4622 Dresher Trail, Stow, OH
44224 (US). **KHAN, Asad, A.** [US/US]; 901 Admore,

[Continued on next page]

(54) Title: STAKED DISPLAY WITH SHARED ELECTRODE ADDRESSING

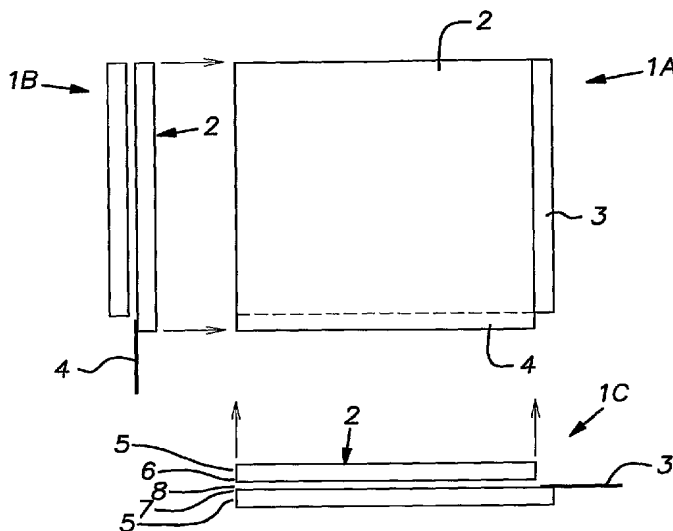

(57) Abstract: A stacked color liquid crystal display uses shared electrode addressing including a plurality of liquid crystal layers each sandwiched between electrically conductive layers. Adjacent liquid crystal layers share one or two electrode layers located between the adjacent liquid crystal layers: A driving scheme is provided that allows the display to be driven by updating the liquid crystal layers sequentially, concurrently, or some combination of the two. Further, a method of manufacturing the display using a deposition process is also disclosed.

WO 2005/081779 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*